


# ECLISSE DOUBLE

## STUD WALL

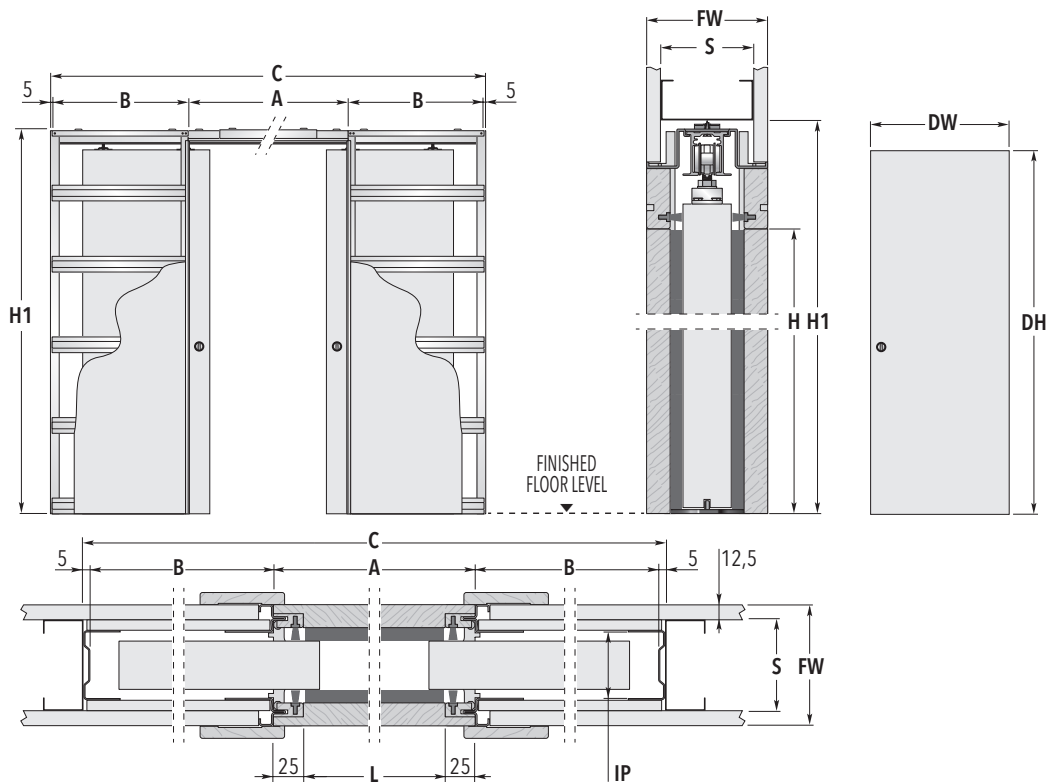

**SYSTEMS FOR DOUBLE DOOR** - Measures related to Italian standards, other dimensions available

PASSAGE SIZE L x H	OVERALL DIMENSIONS			DOOR PANEL*	
	C x H1	A	B	DW	DH
1200 x 2000/2100	2494 x 2090/2190	1250	617	615 ÷ 635	2010/2110
1300 x 2000/2100	2794 x 2090/2190	1350	717	665 ÷ 735	2010/2110
1400 x 2000/2100	2894 x 2090/2190	1450	717	715 ÷ 735	2010/2110
1500 x 2000/2100	3194 x 2090/2190	1550	817	765 ÷ 835	2010/2110
1600 x 2000/2100	3294 x 2090/2190	1650	817	815 ÷ 835	2010/2110
1700 x 2000/2100	3594 x 2090/2190	1750	917	865 ÷ 935	2010/2110
1800 x 2000/2100	3694 x 2090/2190	1850	917	915 ÷ 935	2010/2110
1900 x 2000/2100	3994 x 2090/2190	1950	1017	965 ÷ 1035	2010/2110
2000 x 2000/2100	4094 x 2090/2190	2050	1017	1015 ÷ 1035	2010/2110

FINISHED WALL = FW	STUDWORK = S	INTERNAL PASSAGE = IP
100 →	75	54
125 →	100	79
150 →	100	103

Dimensions are given in mm

### NON-STANDARD SIZES

- ▶ Passage width 600+600÷1200+1200 mm.
- ▶ Passage height 500÷2600 mm.
- ▶ Possibility of measures up to 2000+2000 mm (width) and 3000 mm (height) with sizes and internal passages different from the chart.
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.
- ▶ On non-standard size frames, the horizontal reinforced bars are screwed.

### NOTES

- ▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
- ▶ Max. door weight 100 kg (150 kg on request).
- ▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
- ▶ Install at finished floor level.
- \* Listed measures refers to wooden door panels only.

### ACCESSORIES

- ▶ Double door co-ordination for CLASSIC
- ▶ ECLISSE BIAS®
- ▶ ECLISSE BIAS® DS
- ▶ ECLISSE PUSH&PULL C
- ▶ Motorisation
- ▶ Anti-warp profile