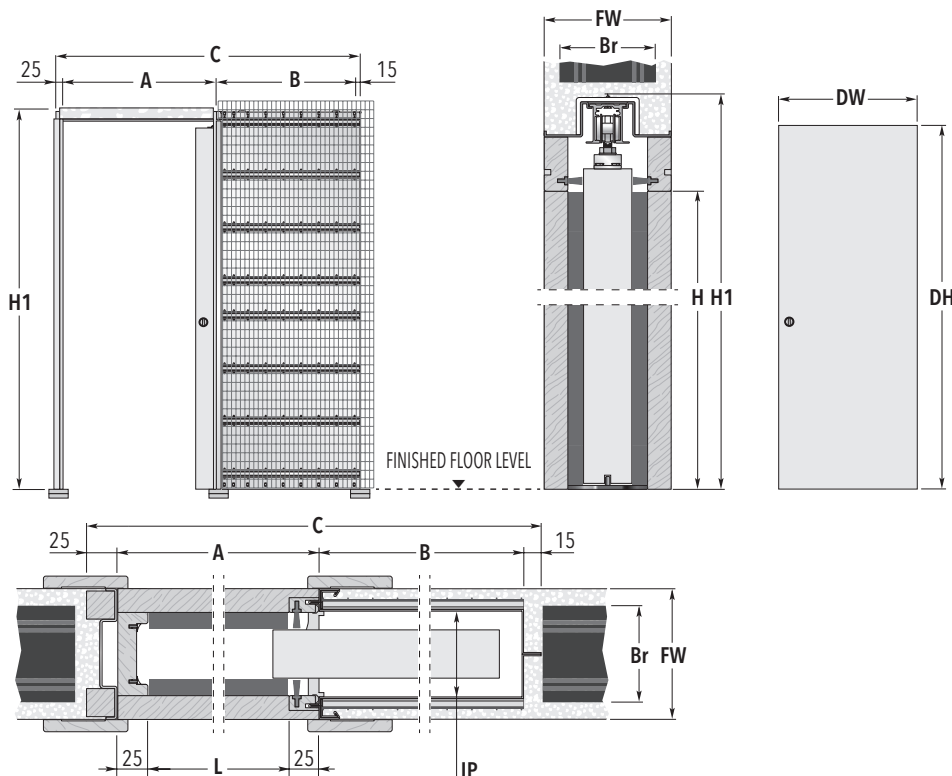# ECLISSE **SINGLE**

SOLID WALL

SYSTEMS FOR SINGLE DOOR - Measures related to Italian standards, other dimensions available

PASSAGE SIZE	OVERALL DIMENSIONS			DOOR PANEL*	
L x H	C x H1	A	B	DW	DH
600 x 2000/2100	1315 x 2090/2190	650	625	615 ÷ 635	2010/2110
650 x 2000/2100	1465 x 2090/2190	700	725	665 ÷ 735	2010/2110
700 x 2000/2100	1515 x 2090/2190	750	725	715 ÷ 735	2010/2110
750 x 2000/2100	1665 x 2090/2190	800	825	765 ÷ 835	2010/2110
800 x 2000/2100	1715 x 2090/2190	850	825	815 ÷ 835	2010/2110
850 x 2000/2100	1865 x 2090/2190	900	925	865 ÷ 935	2010/2110
900 x 2000/2100	1915 x 2090/2190	950	925	915 ÷ 935	2010/2110
950 x 2000/2100	2065 x 2090/2190	1000	1025	965 ÷ 1035	2010/2110
1000 x 2000/2100	2115 x 2090/2190	1050	1025	1015 ÷ 1035	2010/2110

FINISHED WALL = **FW**		BRICKS = **Br**	INTERNAL PASSAGE = **IP**
90	→	60	54
108	→	80	72
125	→	100	89
150	→	120	114

Dimensions are given in mm

NON-STANDARD SIZES

▶ Passage width 600÷1200 mm.
▶ Passage height 500÷2600 mm.
▶ Possibility of measures up to 1500 mm (width) and 2900 mm (height) with sizes and internal passages different from the chart.
▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request.

NOTES

▶ When using pocket with internal dims of 54 mm max. door thickness 40 mm (including any glass holder for glazed door).
▶ Max. door weight 100 kg (150 kg on request).
▶ ECLISSE counterframes can host any sliding door panel of standard dimensions available on the market.
▶ Install at finished floor level.
* Listed measures refers to wooden door panels only.

ACCESSORIES

▶ ECLISSE BIAS®
▶ ECLISSE BIAS® DS
▶ ECLISSE PUSH&PULL C
▶ Self-closing system
▶ Motorisation
▶ Anti-warp profile

ECLISSE
LOOKING FURTHER