
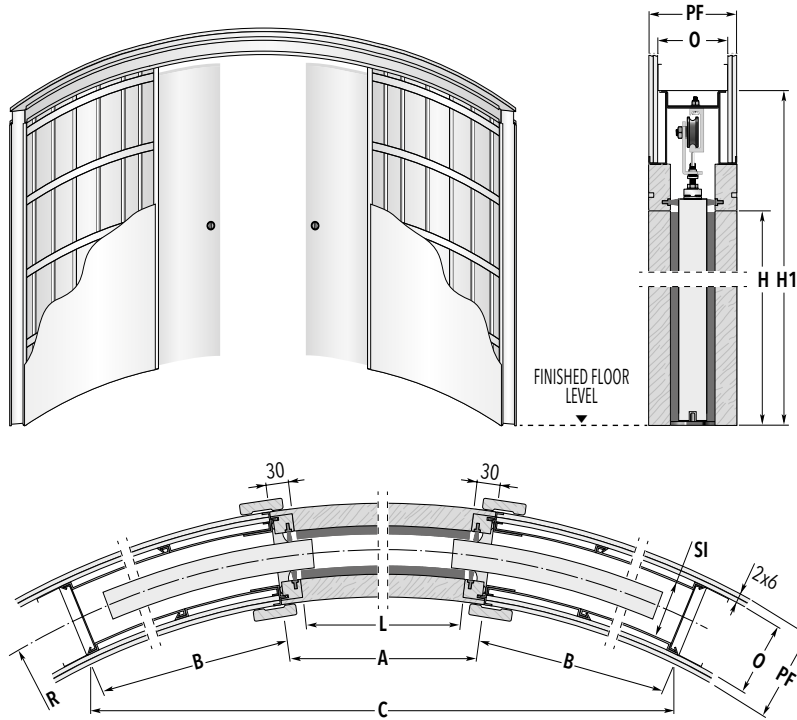


ECLISSE CIRCULAR DOUBLE

STUD WALL

Double Curved Sliding Pocket Door System



STANDARD DIMENSIONS				
RADIUS	PASSAGE SIZE	OVERALL DIMENSIONS		
R	L x H	C x H1	A	B
1000	1200 x 2000/2100	1870 x 2158/2258	1260	695
	1200 x 2000/2100	1840 x 2158/2258	1460	820
1200	1200 x 2000/2100	2115 x 2158/2258	1260	665
	1400 x 2000/2100	2265 x 2158/2258	1460	800
	1600 x 2000/2100	2295 x 2158/2258	1660	930
1300	1800 x 2000/2100	2180 x 2158/2258	1860	1055
	1200 x 2000/2100	2180 x 2158/2258	1260	670
1300	1400 x 2000/2100	2345 x 2158/2258	1460	760
	1600 x 2000/2100	2460 x 2158/2258	1660	895
	1800 x 2000/2100	2455 x 2158/2258	1860	1025
	2000 x 2000/2100	2320 x 2158/2258	2060	1150
1500	1200 x 2000/2100	2300 x 2158/2258	1260	680
	1400 x 2000/2100	2520 x 2158/2258	1460	770
	1600 x 2000/2100	2730 x 2158/2258	1660	910
	1800 x 2000/2100	2835 x 2158/2258	1860	1000
	2000 x 2000/2100	2875 x 2158/2258	2060	1130

STANDARD DIMENSIONS				
RADIUS	PASSAGE SIZE	OVERALL DIMENSIONS		
R	L x H	C x H1	A	B
1700	1200 x 2000/2100	2330 x 2158/2258	1260	640
	1400 x 2000/2100	2660 x 2158/2258	1460	780
	1600 x 2000/2100	2885 x 2158/2258	1660	870
	1800 x 2000/2100	3065 x 2158/2258	1860	965
1800	2000 x 2000/2100	3225 x 2158/2258	2060	1100
	1200 x 2000/2100	2355 x 2158/2258	1260	640
	1400 x 2000/2100	2685 x 2158/2258	1460	780
	1600 x 2000/2100	2930 x 2158/2258	1660	875
2000	1800 x 2000/2100	3135 x 2158/2258	1860	970
	2000 x 2000/2100	3325 x 2158/2258	2060	1105
	1200 x 2000/2100	2385 x 2158/2258	1260	645
	1400 x 2000/2100	2760 x 2158/2258	1460	785
2000	1600 x 2000/2100	3030 x 2158/2258	1660	880
	1800 x 2000/2100	3275 x 2158/2258	1860	975
	2000 x 2000/2100	3480 x 2158/2258	2060	1070

THICKNESS AVAILABLE		
FINISHED WALL	STUDWORK	INTERNAL PASSAGE
PF	O	SI
125	100	72

Dimensions are given in mm



NON STANDARD DIMENSION

counterframes are also available with lengths ranging from 1200 mm to 2400 mm and heights ranging from 1000 mm to 2600 mm. Frames manufactured in increments of 100 mm (width) and 50 mm (height).



WARNING

- ▶ Max door thickness 40 mm (including any frames for glass door).
- ▶ Max door weight 80 kg.
- ▶ Use 2 layers of 6 mm plasterboard on each side of the pocket (only stud wall version).