
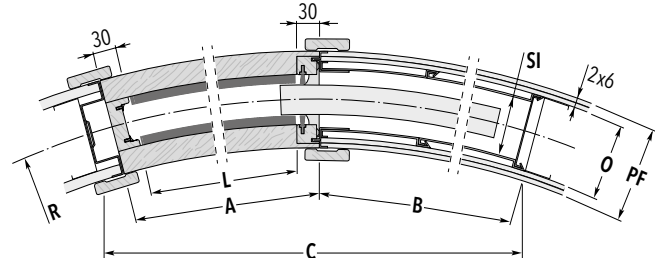
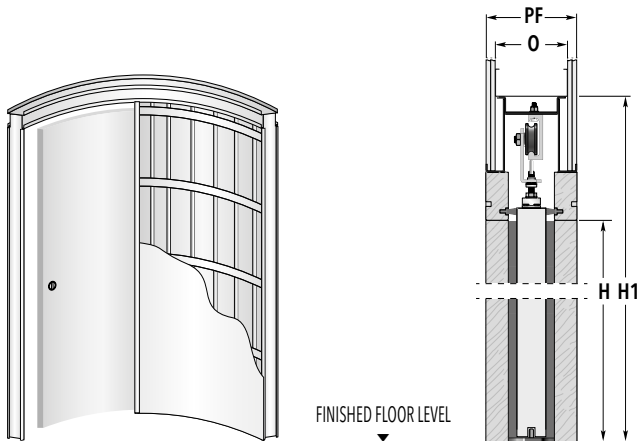


# ECLISSE CIRCULAR

STUD WALL

Curved Sliding Pocket Door System



STANDARD DIMENSIONS				
RADIUS	PASSAGE SIZE	OVERALL DIMENSIONS		
R	L x H	C x H1	A	B
<b>1000</b>	600 x 2000/2100	1250 x 2158/2258	660	650
	700 x 2000/2100	1390 x 2158/2258	760	735
	800 x 2000/2100	1545 x 2158/2258	860	860
	900 x 2000/2100	1650 x 2158/2258	960	940
	1000 x 2000/2100	1760 x 2158/2258	1060	1055
<b>1200</b>	600 x 2000/2100	1295 x 2158/2258	660	665
	700 x 2000/2100	1450 x 2158/2258	760	755
	800 x 2000/2100	1600 x 2158/2258	860	840
	900 x 2000/2100	1770 x 2158/2258	960	970
	1000 x 2000/2100	1890 x 2158/2258	1060	1055
<b>1300</b>	600 x 2000/2100	1305 x 2158/2258	660	670
	700 x 2000/2100	1470 x 2158/2258	760	760
	800 x 2000/2100	1625 x 2158/2258	860	850
	900 x 2000/2100	1775 x 2158/2258	960	935
	1000 x 2000/2100	1940 x 2158/2258	1060	1065
<b>1500</b>	600 x 2000/2100	1330 x 2158/2258	660	675
	700 x 2000/2100	1500 x 2158/2258	760	770
	800 x 2000/2100	1665 x 2158/2258	860	860
	900 x 2000/2100	1825 x 2158/2258	960	950
	1000 x 2000/2100	1975 x 2158/2258	1060	1040

STANDARD DIMENSIONS				
RADIUS	PASSAGE SIZE	OVERALL DIMENSIONS		
R	L x H	C x H1	A	B
<b>1700</b>	600 x 2000/2100	1300 x 2158/2258	660	640
	700 x 2000/2100	1480 x 2158/2258	760	730
	800 x 2000/2100	1695 x 2158/2258	860	870
	900 x 2000/2100	1865 x 2158/2258	960	965
	1000 x 2000/2100	2025 x 2158/2258	1060	1055
<b>1800</b>	600 x 2000/2100	1350 x 2158/2258	660	685
	700 x 2000/2100	1530 x 2158/2258	760	780
	800 x 2000/2100	1705 x 2158/2258	860	870
	900 x 2000/2100	1875 x 2158/2258	960	965
	1000 x 2000/2100	2040 x 2158/2258	1060	1055
<b>2000</b>	600 x 2000/2100	1360 x 2158/2258	660	690
	700 x 2000/2100	1540 x 2158/2258	760	785
	800 x 2000/2100	1720 x 2158/2258	860	880
	900 x 2000/2100	1900 x 2158/2258	960	970
	1000 x 2000/2100	2070 x 2158/2258	1060	1065

## THICKNESS AVAILABLE

FINISHED WALL	STUDWORK	INTERNAL PASSAGE
PF	O	SI
125	100	72

Dimensions are given in mm



### NON STANDARD DIMENSION

counterframes are also available with lengths ranging from 600 mm to 1200 mm and heights ranging from 1000 mm to 2600 mm (50 mm difference between the various sizes).



### WARNING

- ▶ Max door thickness 40 mm (including any frames for glass door).
- ▶ Max door weight 80 kg.
- ▶ Use 2 layers of 6 mm plasterboard on each side of the pocket (only stud wall version).
- ▶ Always specify the handing.

