





Eclisse LUCE SD

version **SOLID WALL**

Sliding door systems for single doors, wiring ready



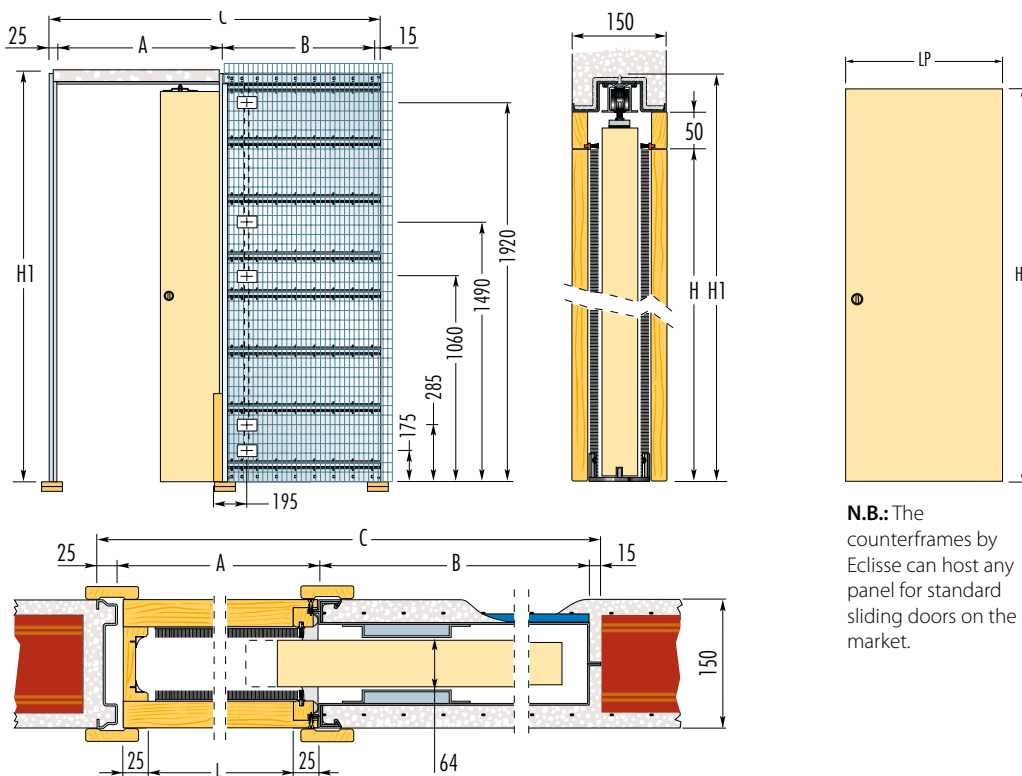

An exclusive product that results from our long experience. Eclisse LUCE is the first counterframe that allows drawing the wires and mounting the electric boxes (max. 5 on each side) in the wall hosting the disappearing doors. A further opportunity to save space and customise it.



N.B.: The counterframes by Eclisse can host any panel for standard sliding doors on the market.

STANDARD COUNTERFRAME						DOOR PANEL		NOTES
MAX. PASSAGE SIZE L x H	OVERALL DIMENSION C x H1	A	B	FINISHED WALL	INTERNAL SPACE	LP	HP	
600 x 2000/2100	1315 x 2090/2190	650	625	150	64	615 ÷ 635	2010/2110	<p>Non standard sizes: counterframes are also available with lengths ranging from 600 mm to 1300 mm and heights ranging from 1000 mm to 2600 mm (50 mm difference between the various sizes).</p> <p>Warning</p> <ul style="list-style-type: none"> ▶ We recommend to install a door panel with 45 mm maximum thickness (including a possible pane holding profile) ▶ Max door weight 80 kg. (120 kg. on request) ▶ Max depth of box 40 mm. (2 boxes are supplied)
650 x 2000/2100	1465 x 2090/2190	700	725	150	64			
700 x 2000/2100	1515 x 2090/2190	750	725	150	64	715 ÷ 735	2010/2110	
750 x 2000/2100	1665 x 2090/2190	800	825	150	64			
800 x 2000/2100	1715 x 2090/2190	850	825	150	64	815 ÷ 835	2010/2110	
850 x 2000/2100	1865 x 2090/2190	900	925	150	64			
900 x 2000/2100	1915 x 2090/2190	950	925	150	64	915 ÷ 935	2010/2110	
950 x 2000/2100	2065 x 2090/2190	1000	1025	150	64			
1000 x 2000/2100	2115 x 2090/2190	1050	1025	150	64	1015 ÷ 1035	2010/2110	

dimensions are given in mm

AVAILABLE ACCESSORIES	TREATMENTS
 <p>Rallenty Soft Allows the door to close softly - everytime</p>	<ul style="list-style-type: none"> ■ Anticorrosion
 <p>Self closing system The door closes automaticall by itself</p>	<p>ADVANTAGES - The counterframes by ECLISSE are:</p> <ul style="list-style-type: none"> ■ Robust for greater reliability and duration. ■ They can be checked to have doors always sliding properly. ■ They can be customised with accessories to make your rooms more practical.
 <p>Motorized Single or Double Motor driven open/close</p>	
 <p>Under Door Profile It prevents sliding problems because of swelling, caused by moisture</p>	